

SYMBOL	COMMON NAME (SCIENTIFIC NAME)	DESCRIPTION	QTY.	VALUE	POINTS
	LIVE OAK (QUERCUS VIRGINIA)	CANOPY TREES > 1.5 CAL.	5	200	1000
	CEDAR ELM (ULMUS ALATA)	CANOPY TREES > 1.5 CAL.	8	200	1600
*	REDBUD (CERCIS CANADENSIS)	NON-CANOPY TREES > 1.5 CAL.	9	150	1350
$\otimes$	MOUNTAIN LAUREL (SOPHORA SECUNDIFLORA)	NON-CANOPY TREES > 1.5 CAL.	8	150	1200
⊗	BURFORD HOLLY (ILEX CORNUTA)	SHRUBS < 2 GAL.	100	5	500
	PLANTING BED		2855	1	2855

LANDSCAPING NOTES:

1. APPROVED IRRIGATION PLAN IS REQUIRED PRIOR TO C.O..

2. ALL PLANTINGS MUST BE IRRIGATED.

3. 100% GROUNDCOVER REQUIRED. DECORATIVE PAVING, DECORATIVE ROCK, OR PERENNIAL GRASS REQUIRED IN ALL LOT ISLANDS, SWALES, DRAINAGE AREAS, PARKING LOT SETBACKS, RIGHTS OF WAY, AND ALL ADJACENT PROPERTIES DISTURBED BY CONSTRUCTION.

4. IRRIGATION SYSTEM MUST BE PROTECTED BY EITHER A PRESSURE VACUUM BREAKER, A REDUCED PRESSURE PRINCIPLE BACK FLOW DEVICE, OR A DOUBLE-CHECK BACK BACK FLOW DEVICE, AND INSTALLED AS PER CITY ORDINANCE 2394.

5. ALL BACKFLOW DEVICES MUST BE INSTALLED AND TESTED UPON INSTALLATION AS PER CITY ORDINANCE 2394.

**EXISTING SITE PLAN** 


LANDSCAPE ANALYSIS

DEVELOPED AREA: 56,877 SQ. FT. REQUIRED: 15% = 8,531.55

8,531.55 x 50% = 4,266.775 REQUIRED CANOPY TREES: 14 x 200 = 2,800 NON-CANOPY TREES: 13 x 150 = 1,950 TOTAL POINTS FROM TREES: 4,750

SHRUBS: 100 x 5 = 500 PLANTING BEDS: 2855 SQ. FT. = 2855 GRASS: 4,532 SQ. FT. = 453

TOTAL POINTS: 8,558

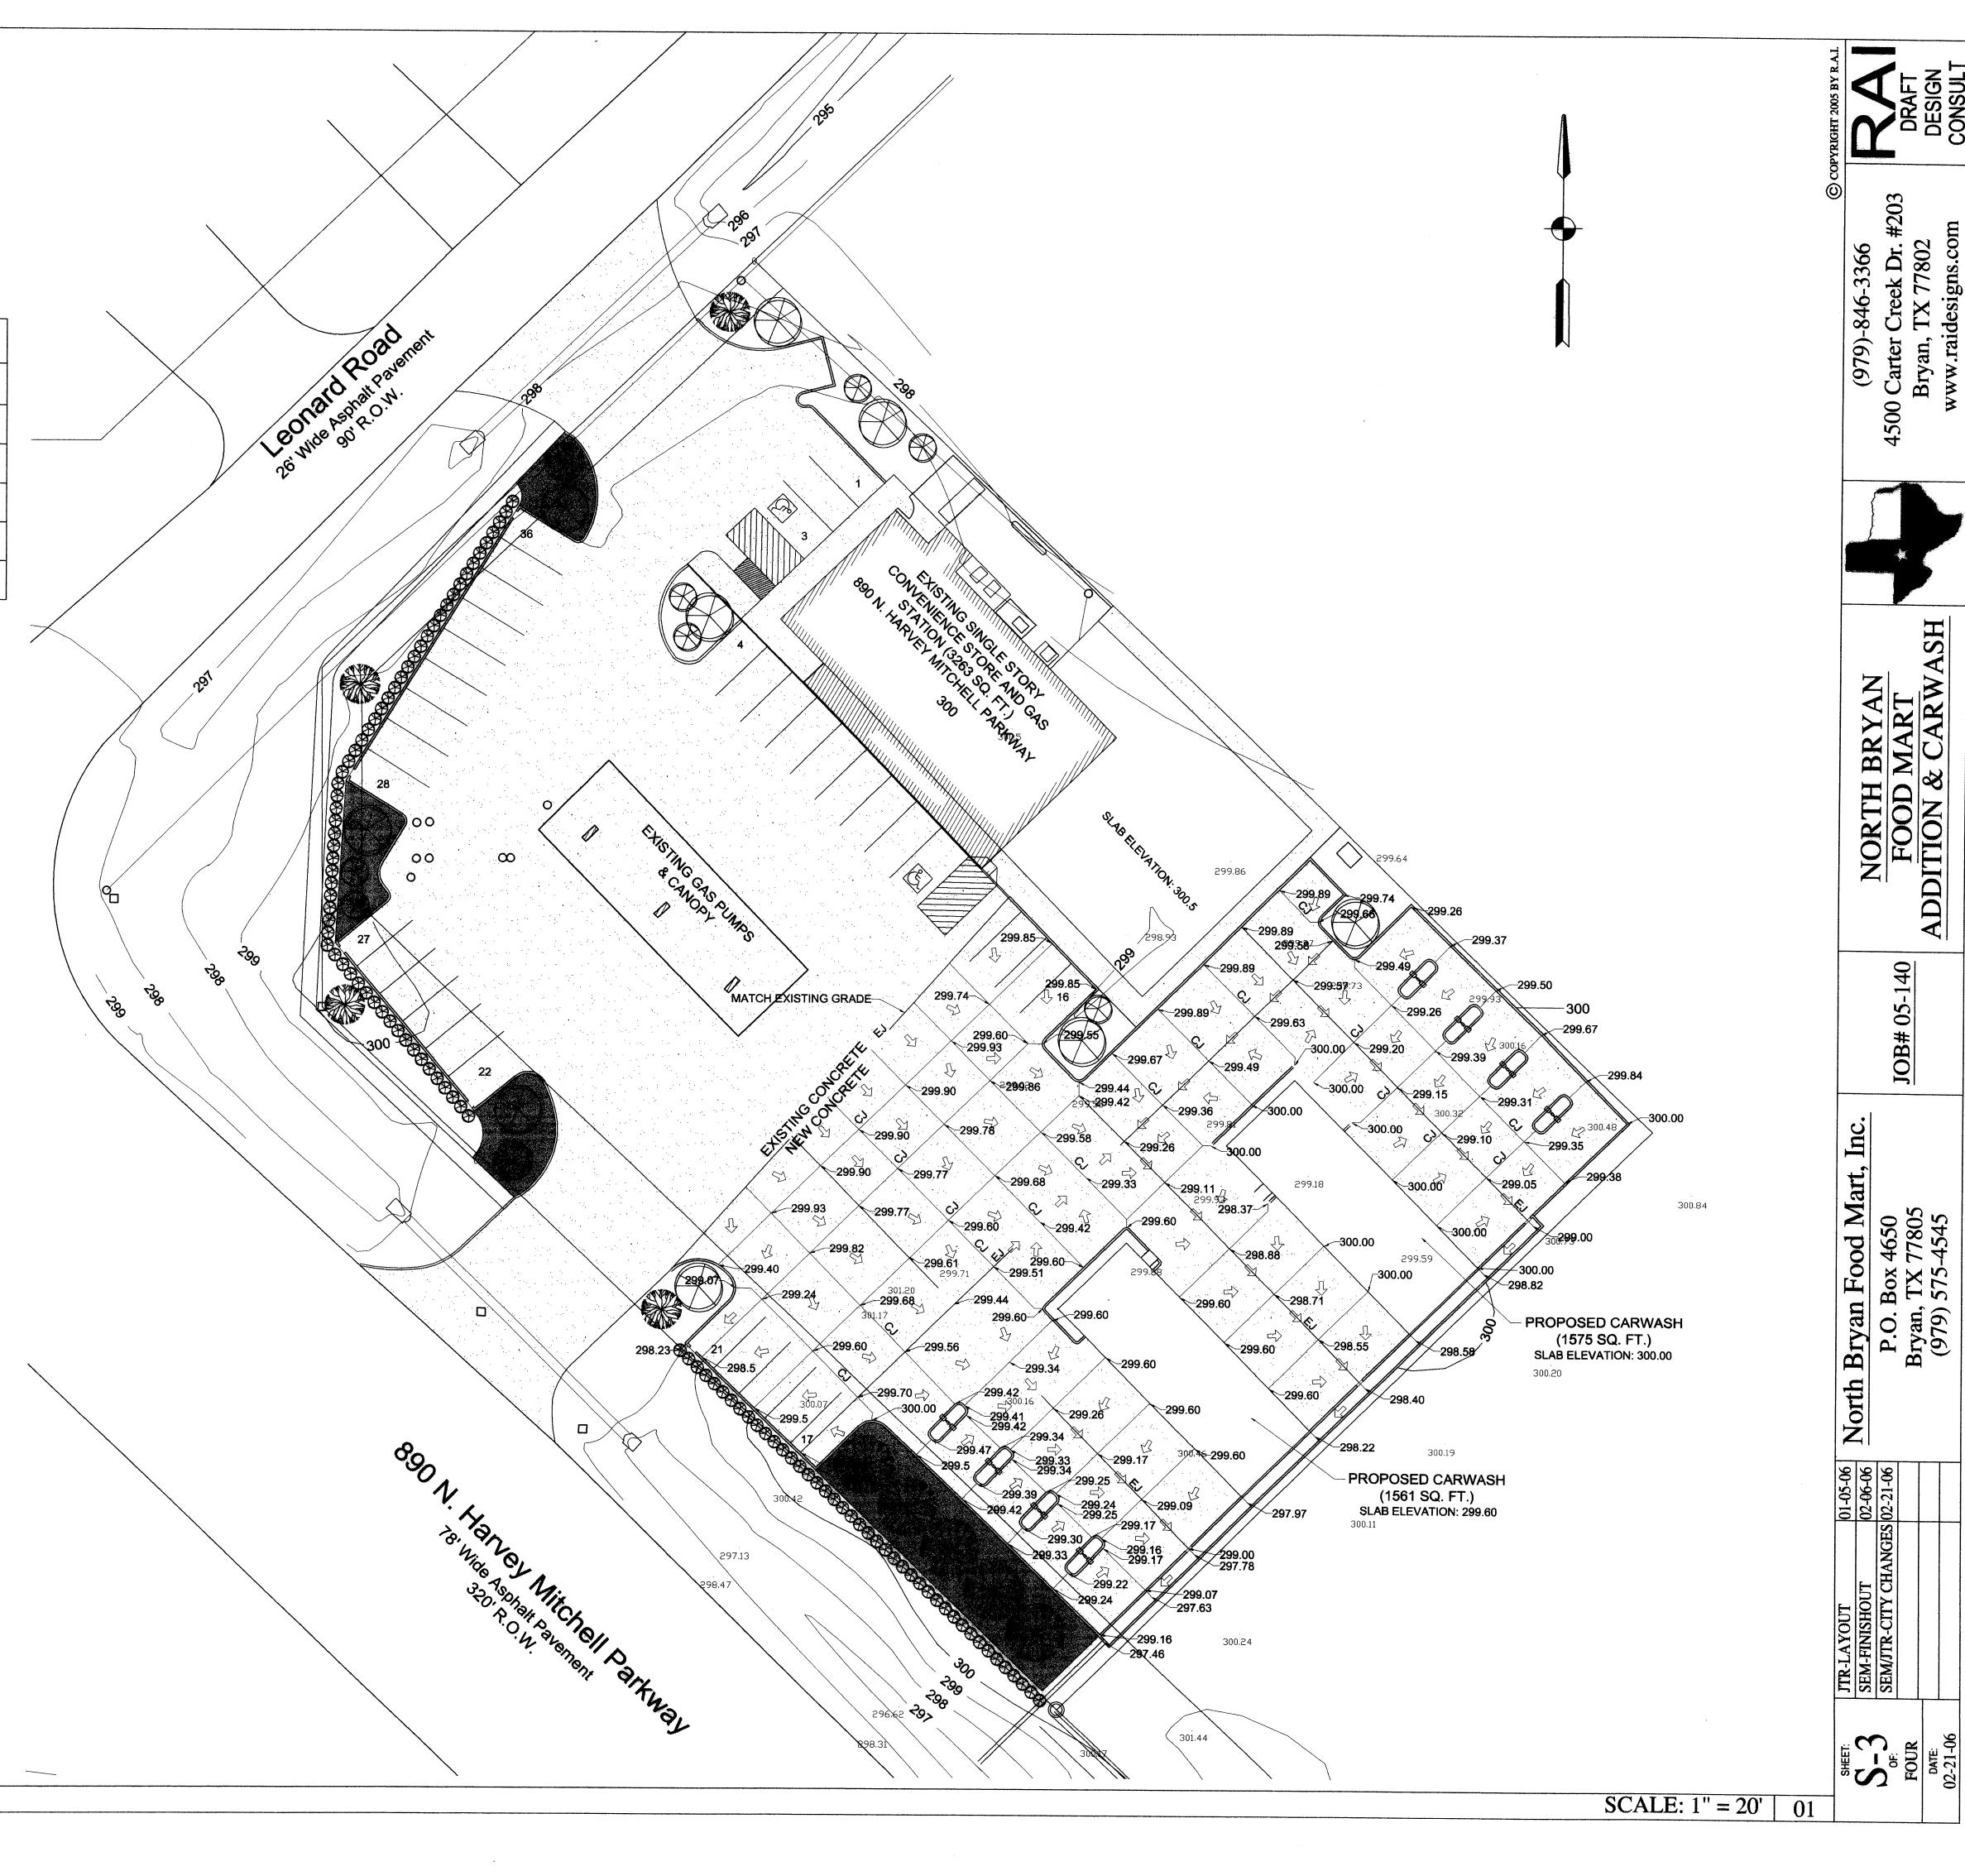

JOB# 05-140