

THIS SITE DOES NOT LIE WITHIN THE 100-YEAR FLOODPLAIN AS GRAPHICALLY DEPICTED FEMA FIRM COMMUNITY NO. 48041, PANEL NO. 0133 C, WITH A EFFECTIVE DATE OF JULY 2, 1992.

. DESIGNATED HANDICAP PARKING SPACES, WALKS & RAMPS SHALL MEET ALL TAS & ANSI STANDARDS

ENHANCED PAVING FOR CONCRETE SIDEWALKS SHALL CONSIST OF EITHER BRICK PAVERS OR STAMPED CONCRETE. COLOR AND PATTERN SHALL BE DETERMINED BY THE OWNER, BUT GREY OR NATURAL CONCRETE COLORS ARE NOT PERMITTED.

WHEN BUILDING SETBACKS AND EASEMENT LINES OVERLAP ONLY THE EASEMENT LINE IS SHOWN

100% COVERAGE OF GROUND COVER, DECORATIVE PAVING, DECORATIVE ROCK, OR A PERENNIAL GRASS IS REQUIRED IN PARKING LOT ISLANDS, SWELLS AND DRAINAGE AREAS, THE PARKING LOT SET BACK, RIGHT—OF—WAY, AND ADJACENT PROPERTY DISTURBED DURING CONSTRUCTION.

THE IMPROVEMENTS SHOWN SHALL CONSTITUTE APPROXIMATELY 85% IMPERVIOUS COVER ON THE SUBJECT PROPERTY

NO FLOOR DRAINS WILL BE REQUIRED FOR INDUSTRIAL PURPOSES.

. NO DETENTION FACILITY IS REQUIRED THE PROPOSED DEVELOPMENT.

NO SANITARY SEWER, OF ANY TYPE, SHALL BE GENERATED AND DISPOSED INTO THE PUBLIC SEWER SYSTEM FROM THIS SITE.

10. A VARIANCE FOR THE FRONT BUILDING SETBACK TO REDUCE THE DISTANCE TO 1.0' WAS APPROVED BY THE PLANNING & ZONNING COMMISSION ON JULY 20, 2006.

. THIS SITE'S SOLID WASTE SHALL BE DISPOSED BY ONE 90 GALLON AUTOMATED TRASH CONTAINERS.

2. UNLESS OTHERWISE SHOWN OR DENOTED, ALL EXISTING SURFACES CONSIST OF CONCRETE PAVEMENT.

13. THE TOPOGRAPHIC INFORMATION SHOWN WAS OBTAINED FROM THE CITY OF BRYAN.

14. THE BATHROOM FACILITY, LOCATED IN THE EXISTING RESTAURANT BUILDING, SHALL PROVIDE PUBLIC REST ROOM FACILITIES FOR THIS DEVELOPMENT.

15. THE 2005 B/CS UNIFIED TECHNICAL SPECIFICATIONS AND STANDARD DETAILS FOR STREET AND SIDEWALK CONSTRUCTION ARE ISSUED FOR THIS

16. OPEN STORAGE OF ANY KIND IS NOT PERMITTED WITHIN THIS C-3 ZONING DISTRICT. OPEN STORAGE IS THE KEEPING, DISPLAYING, OR STORING, OUTSIDE THE BUILDING, OF ANY NEW OR USED GOODS, MATERIAL, MERCHANDISE, OR EQUIPMENT ON A LOT OR TRACT FOR MORE THAN 24 HOURS.

7. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CONTAINMENT AND PROPER DISPOSAL OF ALL LIQUID AND SOLID WASTE ASSOCIATED WITH THIS PROJECT. THE CONTRACTOR SHALL USE ALL MEANS NECESSARY TO PREVENT THE OCCURRENCE OF WIND BLOWN LITTER FROM THE PROJECT SITE.

18. THE CONTRACTOR SHALL BE REQUIRED TO PROVIDE CONTAINMENT FOR WASTE PRIOR TO, AND DURING, DEMOLITION/CONSTRUCTION. SOLID WASTE

### **DIMENSIONAL CONTROL NOTES:**

THE CONTRACTOR MAY OBTAIN AN ELECTRONIC COPY OF THE SITE PLAN FOR CONSTRUCTION PURPOSES. THE ELECTRONIC FILE AND INFORMATION GENERATED. BY RABON METCALE ENGINEERING (RME), FOR THIS PROJECT IS CONSIDERED BY RME TO BE CONFIDENTIAL. WHEN ISSUED, IT'S USE IS INTEND SOLELY FOR THE INDIVIDUAL OR ENTITY TO WHICH IT IS ADDRESSED. THIS MATERIAL IS INTENDED FOR USE BY THE RECIPIENT NAMED, ONLY, AND PERMISSION IS NOT GRANTED TO THE RECIPIENT FOR DISTRIBUTION OF THESE DOCUMENTS IN ANY FORM OR FASHION. THE RECIPIENT UNDERSTANDS THAT THIS DATA IS AUTHORIZED "AS IS" WITHOUT ANY WARRANTY AS TO ITS PERFORMANCE, ACCURACY, FREEDOM FROM ERROR, OR AS TO ANY RESULTS GENERATED THROUGH ITS USE. THE RECIPIENT ALSO UNDERSTANDS AND AGREES THAT RME, UPON RELEASE OF SUCH DATA, IS NO LONGER RESPONSIBLE FOR THEIR USE OR MODIFICATION. THE USER AND RECIPIENT OF THE ELECTRONIC DATA ACCEPTS FULL RESPONSIBILITY AND LIABILITY FOR ANY CONSEQUENCES ARISING OUT OF THEIR USE.

ALL DIMENSIONS SHOWN ARE TO BE USED IN CONJUNCTION WITH THESE PLANS FOR LOCATING ALL IMPROVEMENTS AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR FOR WORKABILITY PRIOR TO CONSTRUCTION OF IMPROVEMENTS.

3. UNLESS OTHERWISE SHOWN, ALL DIMENSIONING IS TO THE BACK OF CURB OR EDGE OF PAVEMENT, WHICHEVER IS APPLICABLE.

4. UNLESS OTHERWISE SHOWN, ALL RADIUS FOR CURBS ARE 4'-0" (AT FACE OF CURB) AND 2'-0" FOR SIDEWALKS.

. BOUNDARY AND AS-BUILT DATA SHOWN WAS PROVIDED BY KERR SURVEYING, LLC. (505 CHURCH STREET, COLLEGE STATION, TX 77840) UNDER THE DIRECTION OF MR. BRAD KERR, R.P.L.S. No. 4502.

. PROJECT BENCHMARK: COB GPS MONUMENT NO. 36: BRASS CAP IN CONCRETE MARKER LOCATED ON THE NORTHWEST CORNER OF INTERSECTION OF WILLIAM JOEL BRYAN PARKWAY & WASHINGTON STREET (ELEVATION = 371.82' (NGVD 29))

### <u>GENERAL UTILITY NOTES (PRIVATE & PUBLIC):</u>

ALL EXCAVATION FOR UNDERGROUND UTILITIES SHALL BE MADE TRUE TO GRADE. EXCAVATION SHALL BE MADE A MINIMUM OF SIX INCHES BELOW THE REQUIRED GRADE AND PROVIDE A SAND BED FOR THE PIPING. BACKFILL OVER PIPING SHALL BE MADE WITH EARTH OR FILL SAND, FREE OF DEBRIS, AND SHALL BE TAMPED BY HAND OR MECHANICAL MEANS TO THE DENSITY OF THE ADJACENT UNDISTURBED EARTH OR TO 95% STANDARD PROCTOR DENSITY (ASTM D698), WHICHEVER IS GREATER. ALL TRENCHING AND EXCAVATION SHALL BE DONE IN STRICT ACCORDANCE WITH CURRENT OSHA REQUIREMENTS AND ALL OTHER APPLICABLE SAFETY CODES AND STANDARDS.

MINIMUM BURY OR COVER SPECIFIED IS TO BE MEASURED FROM FINISHED GRADES. WHERE UTILITY LINES EXTEND UNDER PAVEMENT, THE BURY OR COVER SHALL BE MEASURED FROM THE BOTTOM OF THE STRUCTURE.

3. UTILITY INSTALLATIONS IN NON-STRUCTURAL AREAS SHALL BE BACKFILLED WITH TYPE "D" BEDDING REQUIREMENTS. IN STRUCTURAL AREAS (UNDER

FOUNDATIONS, PAVEMENTS, WALKS, ETC ... ) THE UTILITIES SHALL BE BACKFILLED WITH CEMENT STABILIZED SAND.

4. THE CONTRACTOR SHALL COORDINATE ALL SLEEVING REQUIRED FOR ON—SITE UTILITIES AND IRRIGATION SYSTEMS.

5. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ALL CONNECTIONS TO PUBLIC SYSTEMS AND INSTALLATIONS WITH REGULATORY INSPECTOR.

. CONTRACTOR SHALL MARK ALL SERVICE LEADS WITH PVC PIPE BURIED A MINIMUM OF 3' INTO THE GROUND AND COLOR COORDINATED.

THE CONTRACTOR SHALL INSTALL THE PROPOSED PRIVATE UTILITY LINES IN ACCORDANCE WITH LOCAL CODES, LATEST NATIONAL PLUMBING CODE AND ALL APPLICABLE STATE AND LOCAL LAWS. OTHER PRIVATE OR PUBLIC UTILITIES SHALL BE INSTALLED IN ACCORDANCE WITH THE UTILITY COMPANY'S SPECIFICATIONS. SHOULD THESE DRAWINGS AND SPECIFICATIONS DIFFER WITH OTHER UTILITY COMPANY'S SPECIFICATIONS, THE STRICTER OF THE TWO SHALL

8. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PAY FOR AND OBTAIN ALL REQUIRED PERMITS AND INSPECTION APPROVALS FOR ALL WORK

9. THE CONTRACTOR SHALL COORDINATE ALL INSTALLATIONS OF SERVICES LINES, CONDUIT, METERS, ETC... WITH THE APPROPRIATE UTILITY COMPANY.

# **K** ABON **L**NGINEERING

POST OFFICE BOX 9253 COLLEGE STATION, TEXAS 77842 EMAIL: rmengineer@juno.com


OFFICE - (979) 690-0329 FAX - (979) 690-0329 CELL - (979) 219-4174

SURVEYOR KERR SURVEYING, LLC 505 CHURCH STREET COLLEGE STATION, TX 77841

OFF: (979) 268-3195

# **SUBSTANTIALLY COMPLETE FOR CONSTRUCTION** 7/26/06

CONSTRUCTION DRAWINGS ISSUED PRIOR TO THIS DATE ARE REPLACED BY THIS SET & SHOULD NOT BE USED FOR CONSTRUCTION.



RV NOR

JUL 2 6 2006

Development & Engineers CLIENT INFORMATION

BRYAN COTTON COMPRESS c/o BILL BALLARD 202 W. 15TH STREET BRYAN, TX 77803


OFF: (979) 775-5491 OFF: (979) 822-3392

FILENAME: 0285SP1A | SCALE: 1"=20" SUBMITTAL DATE: JUNE 28, 2006 DRAWN BY: R.A.M.

CHECKED BY: R.A.M.

TIELD BOOK: N/A PAGES:N/A RABON METCALF ENGINEERING

CLIENT NO. PROJECT NO. 205 - 0285

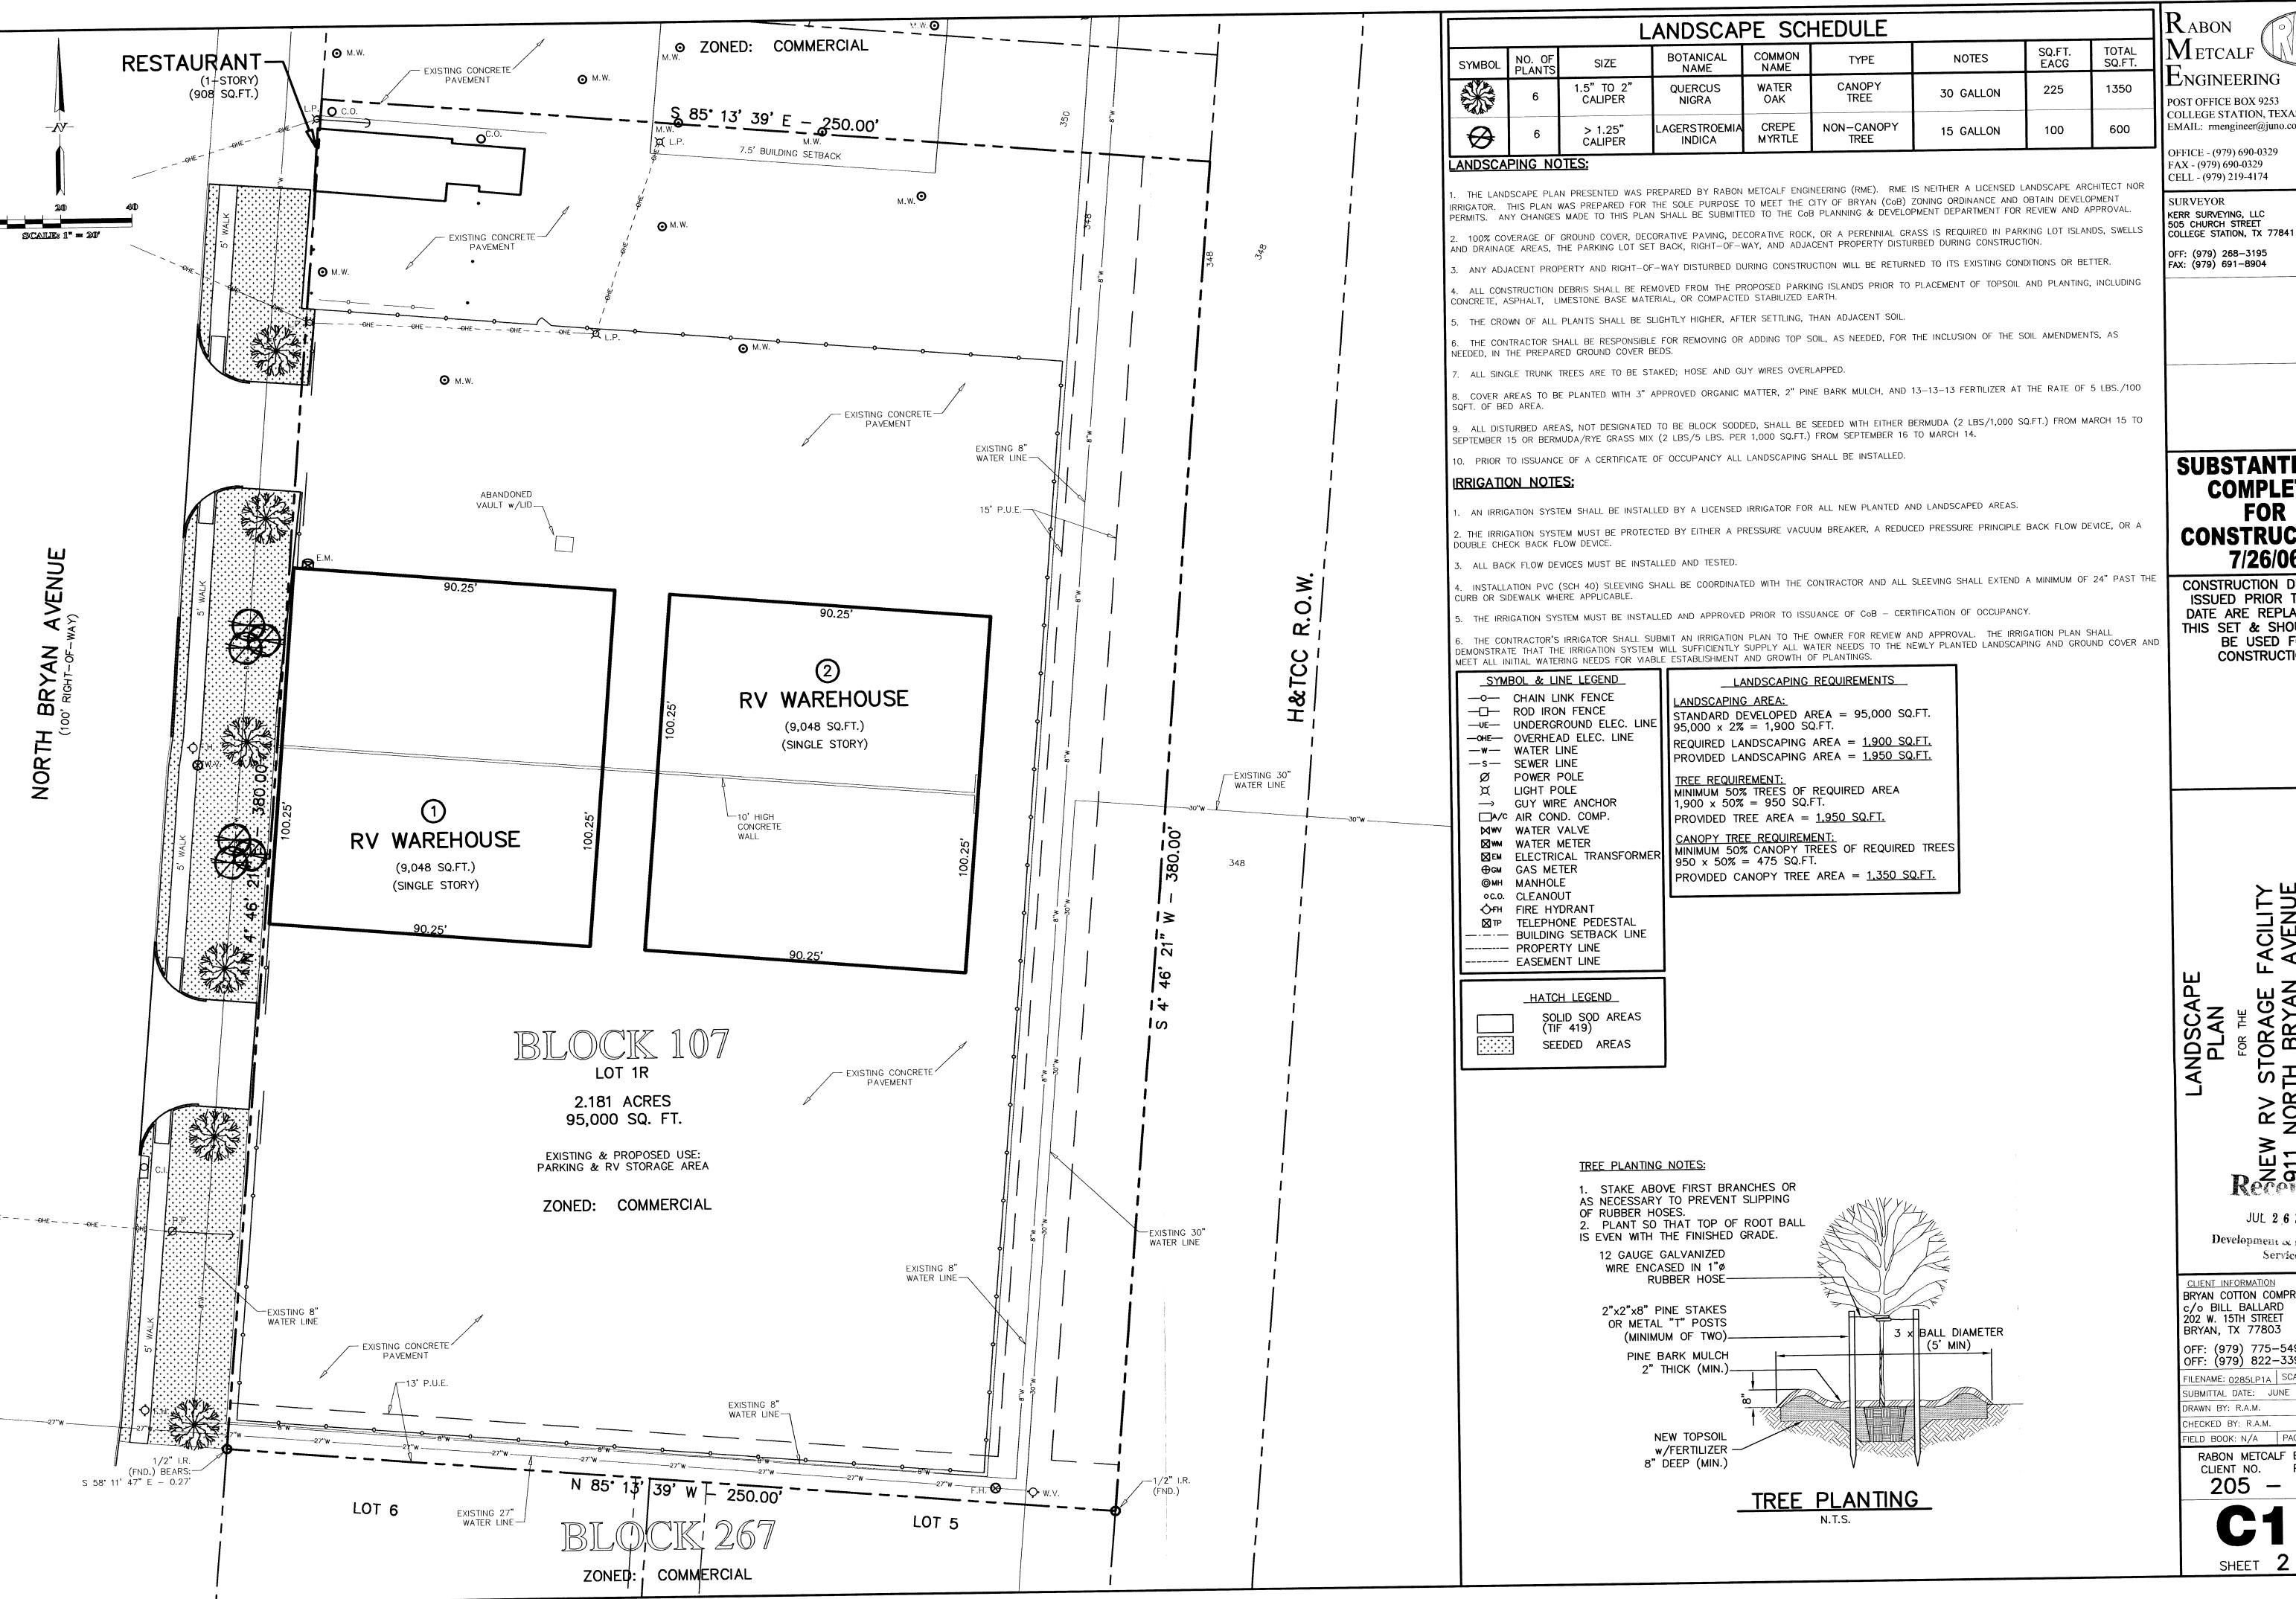

LNGINEERING POST OFFICE BOX 9253

COLLEGE STATION, TEXAS 77842 EMAIL: rmengineer@juno.com OFFICE - (979) 690-0329

CELL - (979) 219-4174 SURVEYOR KERR SURVEYING, LLC

OFF: (979) 268-3195 FAX: (979) 691-8904

# SUBSTANTIALLY COMPLETE **FOR** CONSTRUCTION 7/26/06

CONSTRUCTION DRAWINGS ISSUED PRIOR TO THIS DATE ARE REPLACED BY THIS SET & SHOULD NOT BE USED FOR

CONSTRUCTION.

AVENUE AVENUE

JUL 2 6 2006 Development & Engineering Services

CLIENT INFORMATION BRYAN COTTON COMPRESS c/o BILL BALLARD 202 W. 15TH STREET BRYAN, TX 77803

OFF: (979) 775-5491 OFF: (979) 822-3392

FILENAME: 0285LP1A | SCALE: 1"=20' SUBMITTAL DATE: JUNE 28, 2006 DRAWN BY: R.A.M.

CHECKED BY: R.A.M. ELD BOOK: N/A PAGES:N/A

RABON METCALF ENGINEERING PROJECT NO. CLIENT NO. 0285 205